


XPS Specifications

Section	Width in (w) (mm)	Depth in (d) (mm)	Thickness in (t) (mm)	X-Sectional Area in ² /ft (cm ² /m)	Weight			Coating Area			
					Pile lb/ft (kg/m)	Wall lb/ft ² (kg/m ²)	Allowable Moment lb/ft (Grade 55 1.5 SF)	Section Modulus in ³ /ft (cm ³ /m)	Moment of Inertia in ⁴ /ft (cm ⁴ /m)	Both Sides ft ² /ft of single (m ² /m)	Wall Surface ft ² /ft ² (m ² /m ²)
XPS 42	21.65 (550)	3.54 (90)	0.157 (4.00)	2.53 (53.50)	15.52 (23.10)	8.60 (42.00)	14057	2.55 (137)	4.50 (615)	4.23 (1.29)	1.17 (1.17)
XPS 47	21.65 (550)	3.54 (90)	0.177 (4.50)	2.83 (59.90)	17.40 (25.90)	9.63 (47.00)	15877	2.88 (155)	5.09 (695)	4.23 (1.29)	1.17 (1.17)
XPS 57	21.65 (550)	3.54 (90)	0.217 (5.50)	3.43 (72.60)	21.10 (31.40)	11.67 (57.00)	19460	3.53 (190)	6.22 (850)	4.23 (1.29)	1.17 (1.17)
XPS 55	27.56 (700)	5.91 (150)	0.197 (5.00)	3.29 (69.60)	25.69 (38.23)	11.26 (55.00)	46009	6.34 (341)	18.67 (2,550)	5.87 (1.79)	1.28 (1.28)
XPS 60	27.56 (700)	5.91 (150)	0.217 (5.50)	3.61 (76.40)	28.22 (42.00)	12.29 (60.00)	53231	6.98 (375)	20.48 (2,810)	5.87 (1.79)	1.28 (1.28)
XPS 69	27.56 (700)	5.91 (150)	0.250 (6.35)	4.17 (88.20)	32.58 (48.49)	14.19 (69.27)	61391	8.05 (433)	23.78 (3,247)	5.87 (1.79)	1.28 (1.28)
XPS 76	27.56 (700)	5.91 (150)	0.276 (7.00)	4.57 (96.70)	35.61 (53.00)	15.57 (76.00)	67797	8.89 (478)	26.25 (3,585)	5.87 (1.79)	1.28 (1.28)


XPS Profile

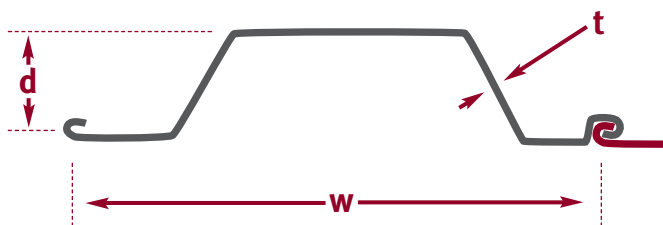

XPS Corner Pile

XPS 42–XPS 57 A=10.8 INCHES (275 mm)

XPS 55–XPS 76 A=13.8 INCHES (350 mm)

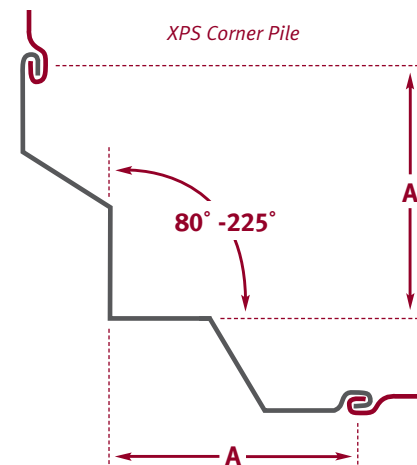

Available Steel Grades

Skyline products are available according to ASTM A 572 Grade 50, 55, or 60.